



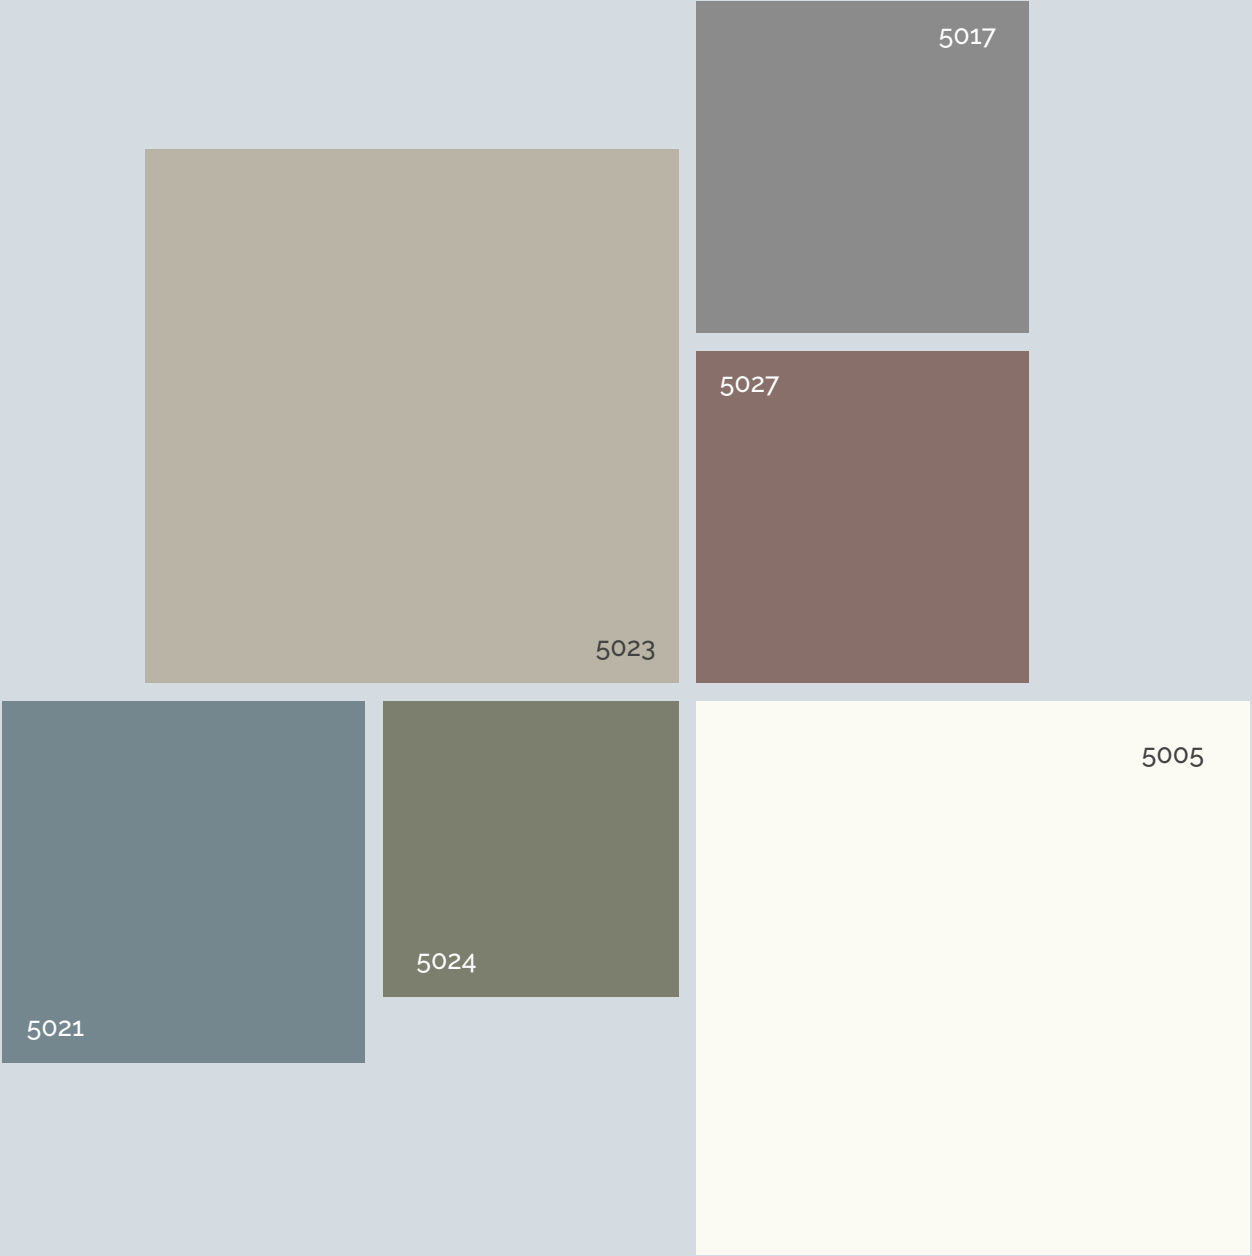

SUBTLE **HUES**
HARMONIOUS ELEGANCE

6H ANTISCRATCH	1.5MM THICKNESS
-----------------------	------------------------



SUBTLE **HUES**
HARMONIOUS ELEGANCE




Sheet Size : 1220mm x 2440mm (4ft x 8 ft)



LD - 5003



LD - 5004

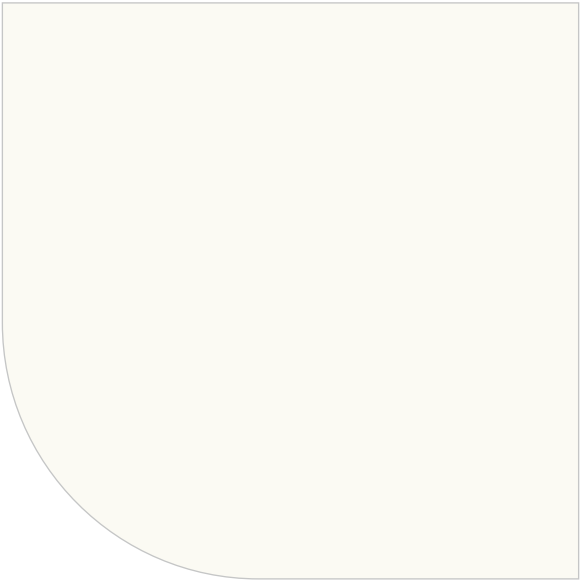

LD - 5005




LD - 5006




LD - 5007



LD - 5008

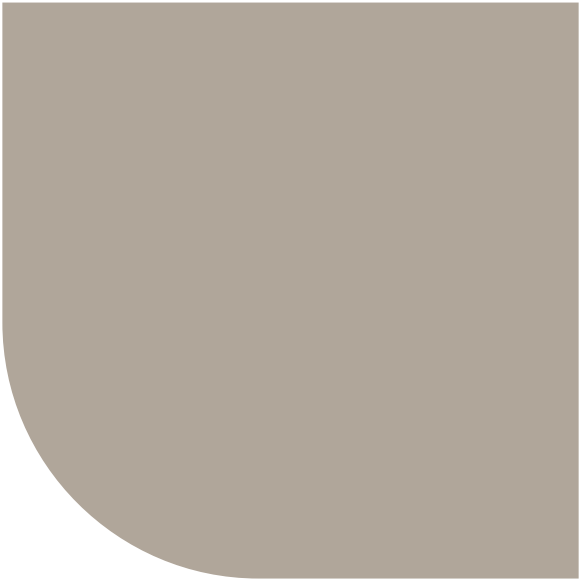

LD - 5009

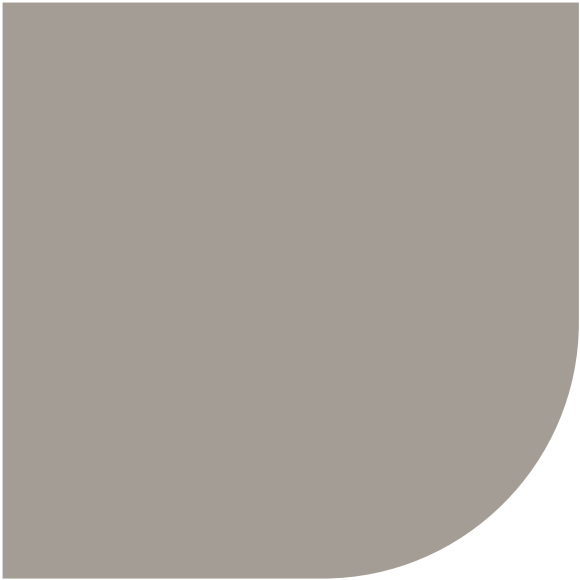

LD - 5010

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

Sheet Size : 1220mm x 2440mm (4ft x 8 ft)



LD - 5011




LD - 5012



LD - 5013



LD - 5014

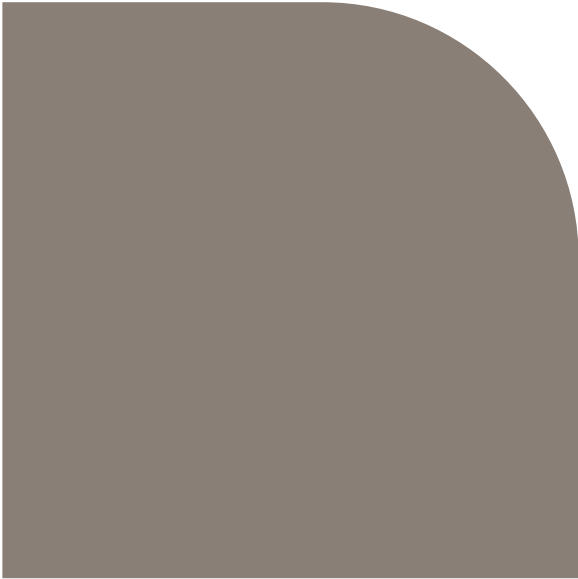


LD - 5015



LD - 5016




LD - 5017

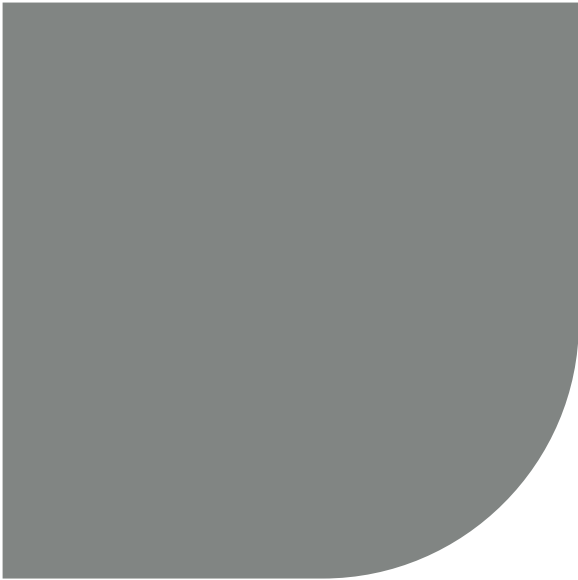


LD - 5018

विभिन्न बैचों की सामग्री के रंग में भिन्नता हो सकती है। रंग में भिन्नता से बचने के लिए एक ही बैच की सामग्री का उपयोग करने की सलाह दी जाती है। लैमिनेट शीट का वास्तविक रंग इस ब्रोशर में दिखाए गए रंग से भिन्न हो सकता है।

Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

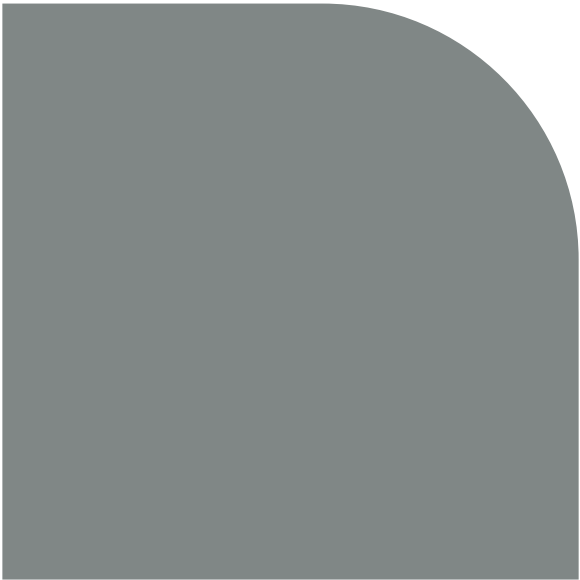

LD - 5019

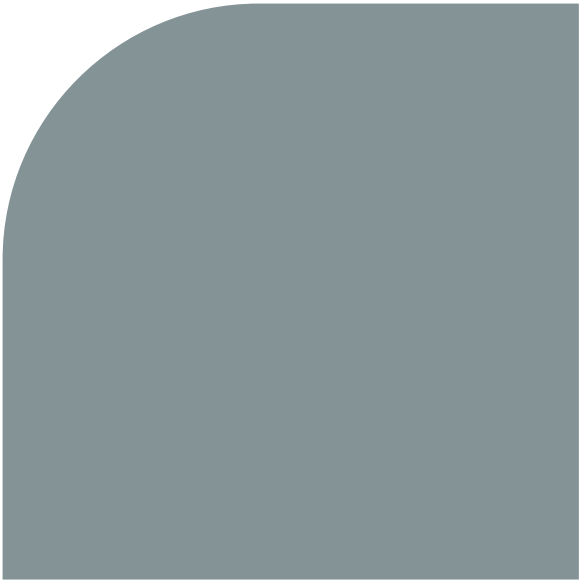


LD - 5020




LD - 5021




LD - 5022

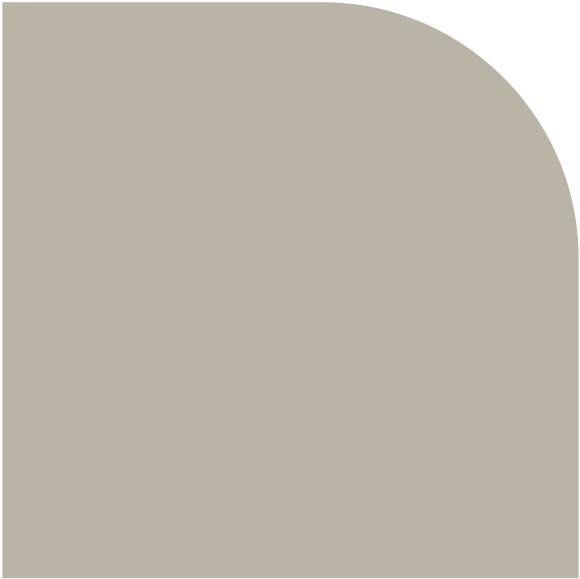


LD - 5023

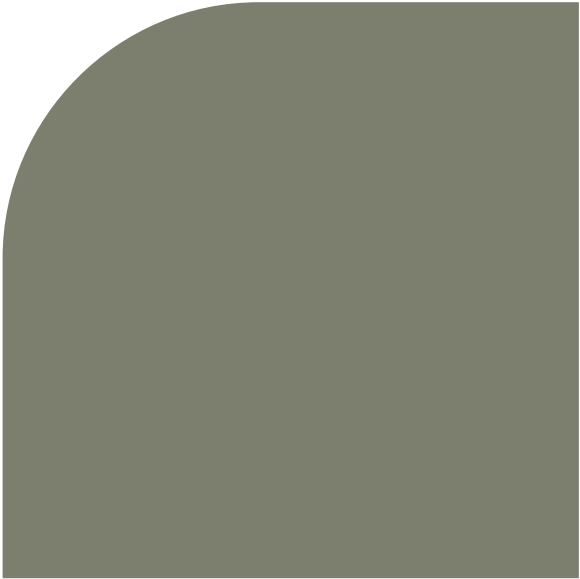

LD - 5024

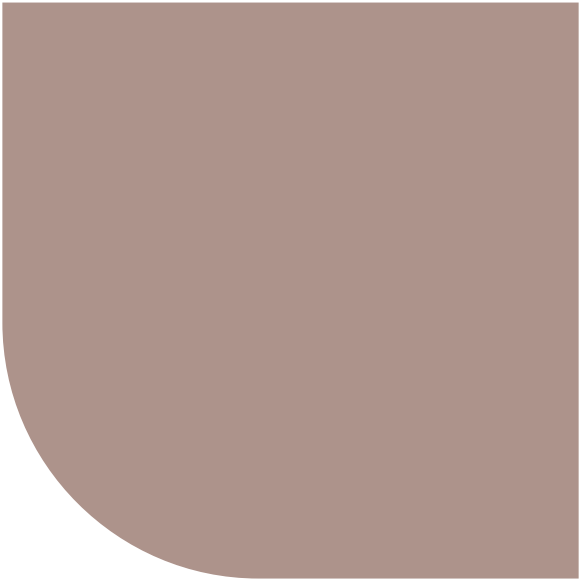


LD - 5025

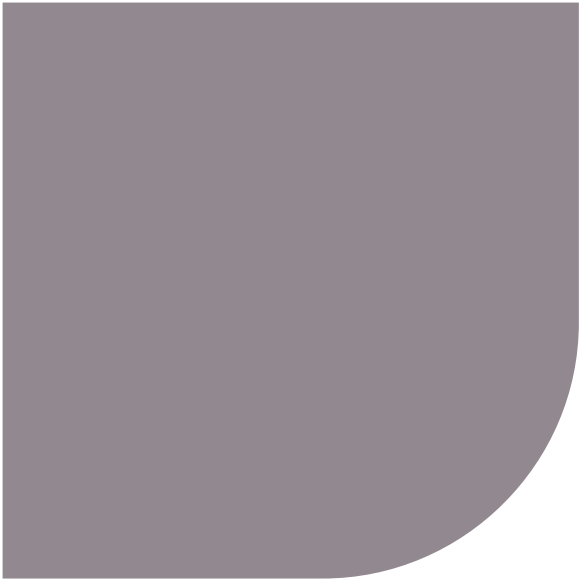

LD - 5026

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

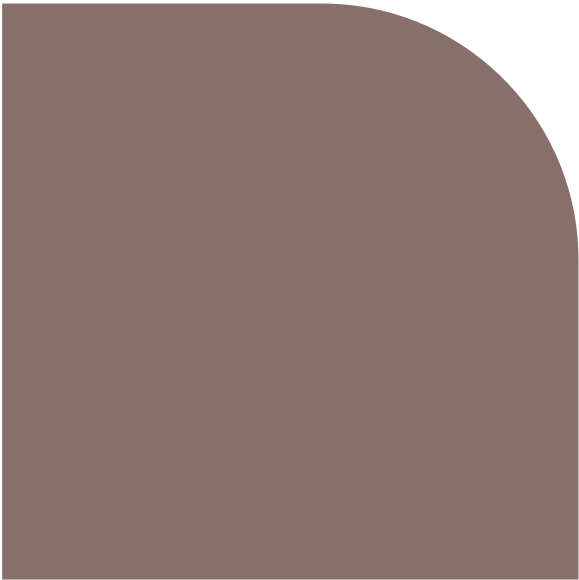

LD - 5027




LD - 5028



LD - 5029



LD - 5030

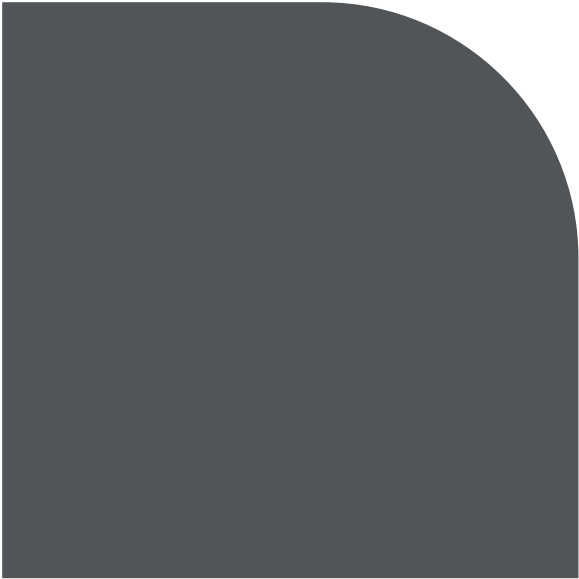

LD - 5031



LD - 5032

विभिन्न बैचों की सामग्री के रंग में भिन्नता हो सकती है। रंग में भिन्नता से बचने के लिए एक ही बैच की सामग्री का उपयोग करने की सलाह दी जाती है। लैमिनेट शीट का वास्तविक रंग इस ब्रोशर में दिखाए गए रंग से भिन्न हो सकता है।

COLOR OF MAGIC



REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS

To avoid delamination / air bubbles in between surface laminate and plywood (or any other suitable substrate) the below points need to take care of it.



AVAILABLE IN SIZE : 2440MM X 1220MM (8FT X 4FT) THICKNESS : 1.3MM - 1.5MM SAME AS SAMPLE USE IN BROCHURE

APPLICATION



KITCHEN



FURNITURE




BATHROOM



COMMERCIAL



HEALTHCARE



RESTAURANTS

COMMON REASONS FOR OUR BUBBLES AND THINGS TO AVOID.



Acrylic are bonded in extremely humid conditions



Use of water base synthetic resin adhesive any other the PEVA (Polyethylene Vinyl Acetate Co-polymer)



When substrate loses moisture after installation



Debonding in certain areas because of uneven substrate surface



Insufficient or lack of pressing during the bonding period of laminate



Use of extremely large acrylic PVC laminate sheets (more than 8 ft x 2 ft long)

DISCLAIMER

Do not use plywood with high moisture content, Do not use ply with uneven surface, Avoid using inferior quality adhesive, Apply sufficient pressure We do not recommend pasting of sheets on the printed/branding area of the plywood

DO'S & DON'T'S

1. Store the laminates below 30°C temperature. To avoid the inside cracks & stretch line, do not store acrylic sheet in roll form.
2. Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft Micro fibre cloth.
3. Glossy surfaces recommended to use in vertical applications.
4. Do not use alcohol based cleaners, solvent, petrol or oil as these may damage the surface of the laminate. Do not use cloth other than micro fibre.
5. Do not use thinner on the surface of LUCENT ACRYLIC laminates.
6. Do not place hot cookware directly on the laminate as the exposure to temperatures above 30°C may cause damage to the laminate surface.
7. Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strictly not recommended. UV rays may de-shape the laminate.

ADVANCED FEATURES



ANTI SCRATCH



PURE ACRYLIC



WATER RESISTANT



TERMITE FREE




EASY TO CLEAN



EASY INSTALLATION



Scratch Resistance
Laminates that exhibit extraordinary features, applying these sheets, be assured of scratch-free surfaces.




1.5mm Thickness
exhibiting great mechanical & thermal properties, installed over sturdy flooring, these laminate sheets get sturdy & long-lasting.



UV Protected
The UV films offer protection against moisture, handling and abrasion. The color clarity remains crisp & clear over time.

PARAMETERS	LUCENT ACRYLIC LAMINATE	HIGH GLOSS LAMINATE MICA	PU COATING / DUCO PAINT	BACK PAINTED GLASS
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	Yes
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

PANEL STRUCTURE

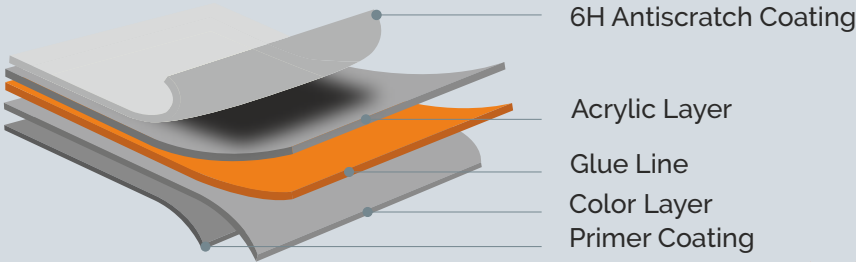

LUCENT



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

विभिन्न बैचों की सामग्री के रंग में भिन्नता हो सकती है। रंग में भिन्नता से बचने के लिए एक ही बैच की सामग्री का उपयोग करने की सलाह दी जाती है।
लैमिनेट शीट का वास्तविक रंग इस ब्रोशर में दिखाए गए रंग से भिन्न हो सकता है।